


ROOF/CEILING ASSEMBLY

WOOD
(4) 16D
COMMON
NAILS
STEEL
(3) #8 LAG
SCREWS

KICKERS (SAME SIZE AS WALL) @ 48" O.C. ALTERNATING DIRECTIONS FROM TOP PLATES TO STRUCTURE ABOVE. MAX 8' LONG

2"x4" STUDS @ 16" O.C.
ALT: STEEL STUDS MIN 3 1/2",
25 GAUGE. MAXIMUM UN-
BRACED LENGTH AS
FOLLOWS:
25 GAUGE 14'
20 GAUGE 18'
16 GAUGE 20'

.145 SHOT PINS OR POWDER DRIVEN
FASTENERS @ 12" O.C. OR
1/2" DIA. EXPANSION BOLTS @ 48" O.C.
THROUGH PRESSURE TREATED WOOD OR
APPROPRIATE STEEL CHANNEL BOTTOM
PLATE
1" MIN EMBEDMENT

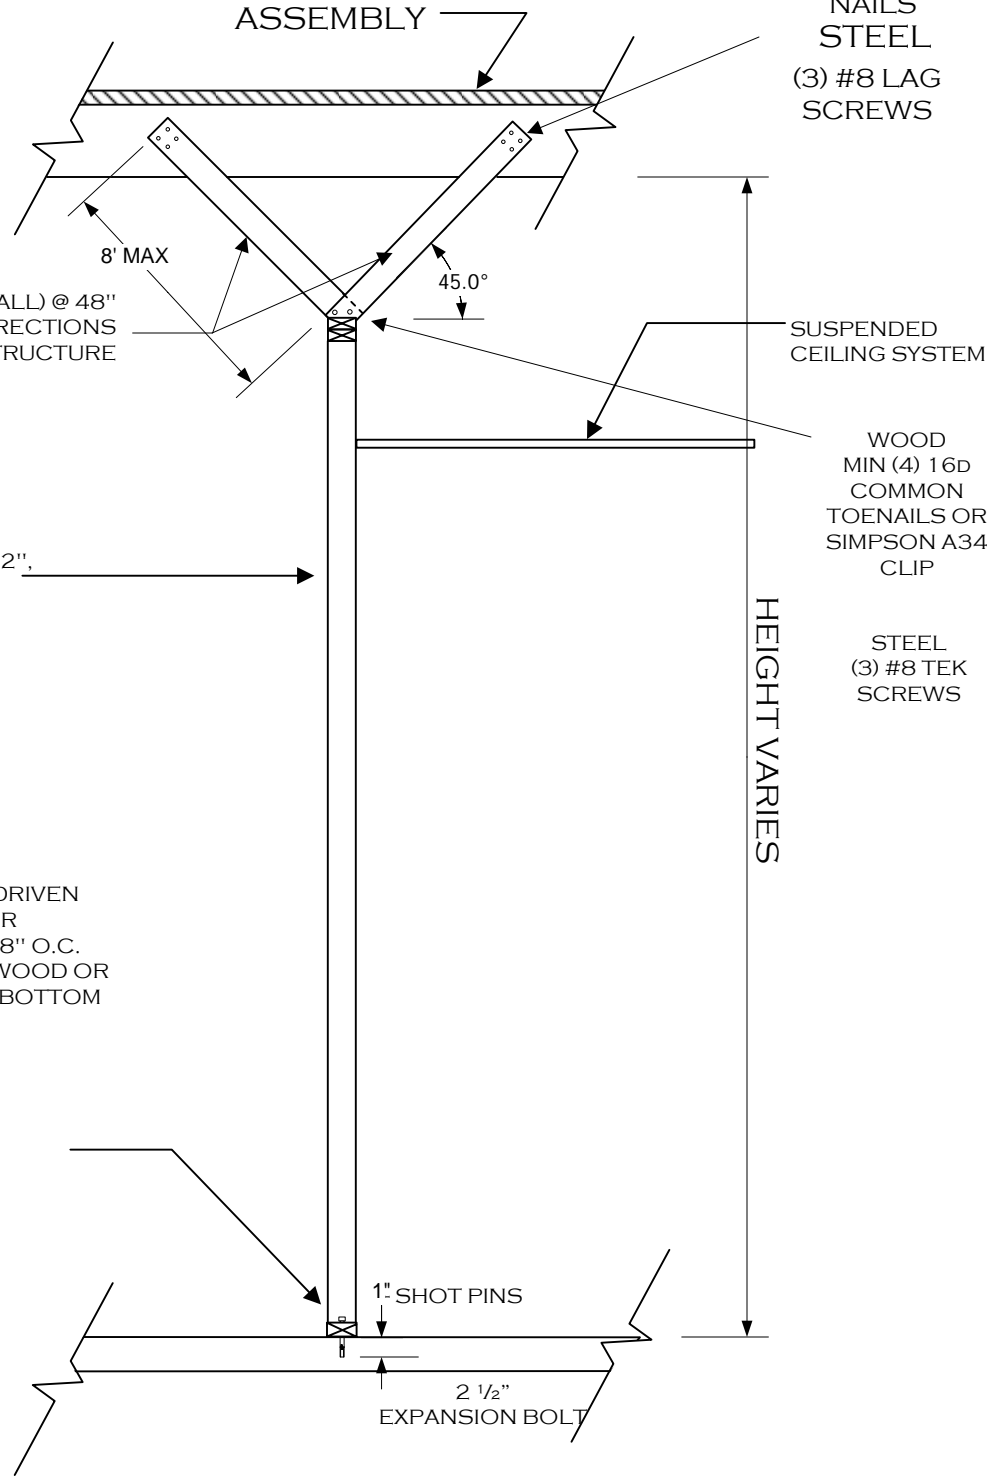

WOOD
MIN (4) 16D
COMMON
TOENAILS OR
SIMPSON A34
CLIP

STEEL
(3) #8 TEK
SCREWS

HEIGHT VARIES



BUILDING DEPARTMENT

**INTERIOR WALL STANDARD
FRAMING DETAIL**

| | | | |
|--------------------|---|------------|--------|
| (909) 736-2250 | 815 WEST SIXTH STREET, CORONA CA 92882-3238 | | |
| FAX (909) 739-4893 | 07/29/2005 | WALLDTLFNL | 1 OF 1 |